



COMPANY PROFILE

上海汉钟精机股份有


PS系列干式螺

PS SERIES DRY SCREW VACUUM PUMP

主要特点：

MAIN FEATURES:


The diagram consists of two large triangles meeting at a vertical line. The triangle on the left is black and contains horizontal white lines. It is labeled 'PS' and 'PD' on its left side. The triangle on the right is white and contains horizontal black lines. It is labeled 'Series' and '(PS)' on its left side.



机型 Model	PS

外形尺寸： PHYSICAL DIMENSION:


N型/N Type

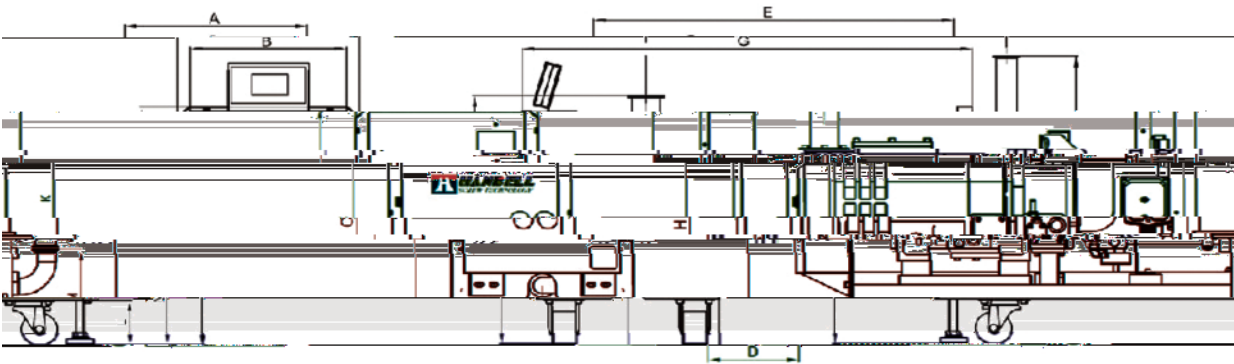

单位/Unit :mm

机型 Model	A	B	C	D	E	G
PS80-N	375	320	550	185	740	922
PS160-N	405	350	565	215	857	1006


A/N型 /A/N Type

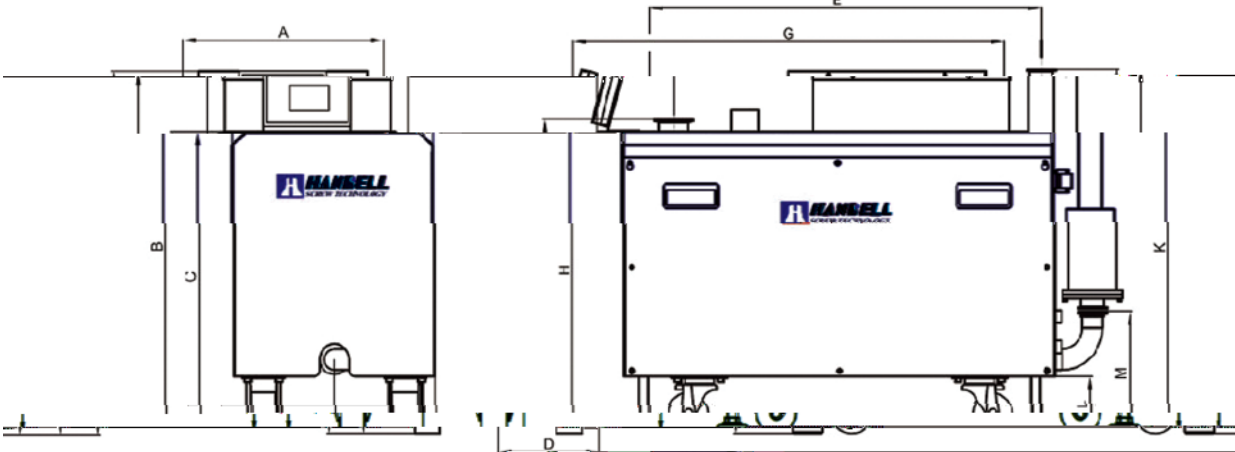

单位/Unit :mm

机型 Model	A	B	C	D	E	G	H
PS80-A	380	663	552	199	740	834	576

● 高

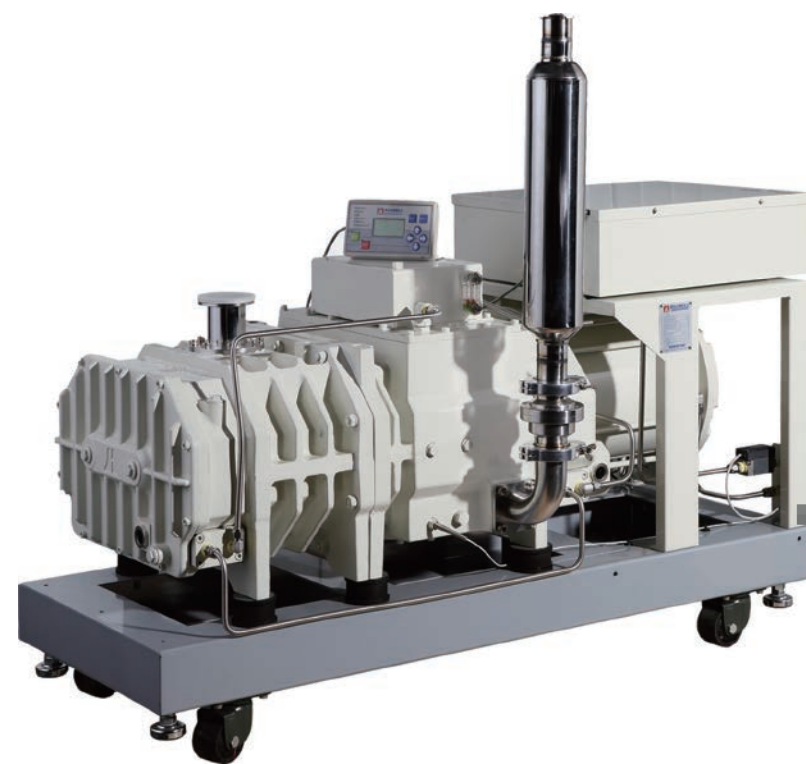

PD性能曲线：

外形尺寸：

PR系列

机型 Model		单位Unit	PR600					

- 可选用唇形与机械轴封的设计,有效阻隔制程气体,



化工专用真空泵浦

Dry Screw Vacuum pump

外形尺寸：physical dimension

性能参数

机型	防爆对应型号	抽气速率l/min	极限压力(Pa)
PS80	Ex80	1600	
PD120	Ex120	2000	
PD160	Ex160	2600	
PD180	Ex180	3000	
PD300	Ex300	5500	
PD400	Ex400	6666	
PD650	Ex650	10840	
PD800	Ex800	13333	

机型	防爆		



汉

产