

Charging Station Solution


PV & ESS & EV Charging Solution

-

SHENZHEN MEGMEET ELECTRICAL CO., LTD.

FOLLOW US



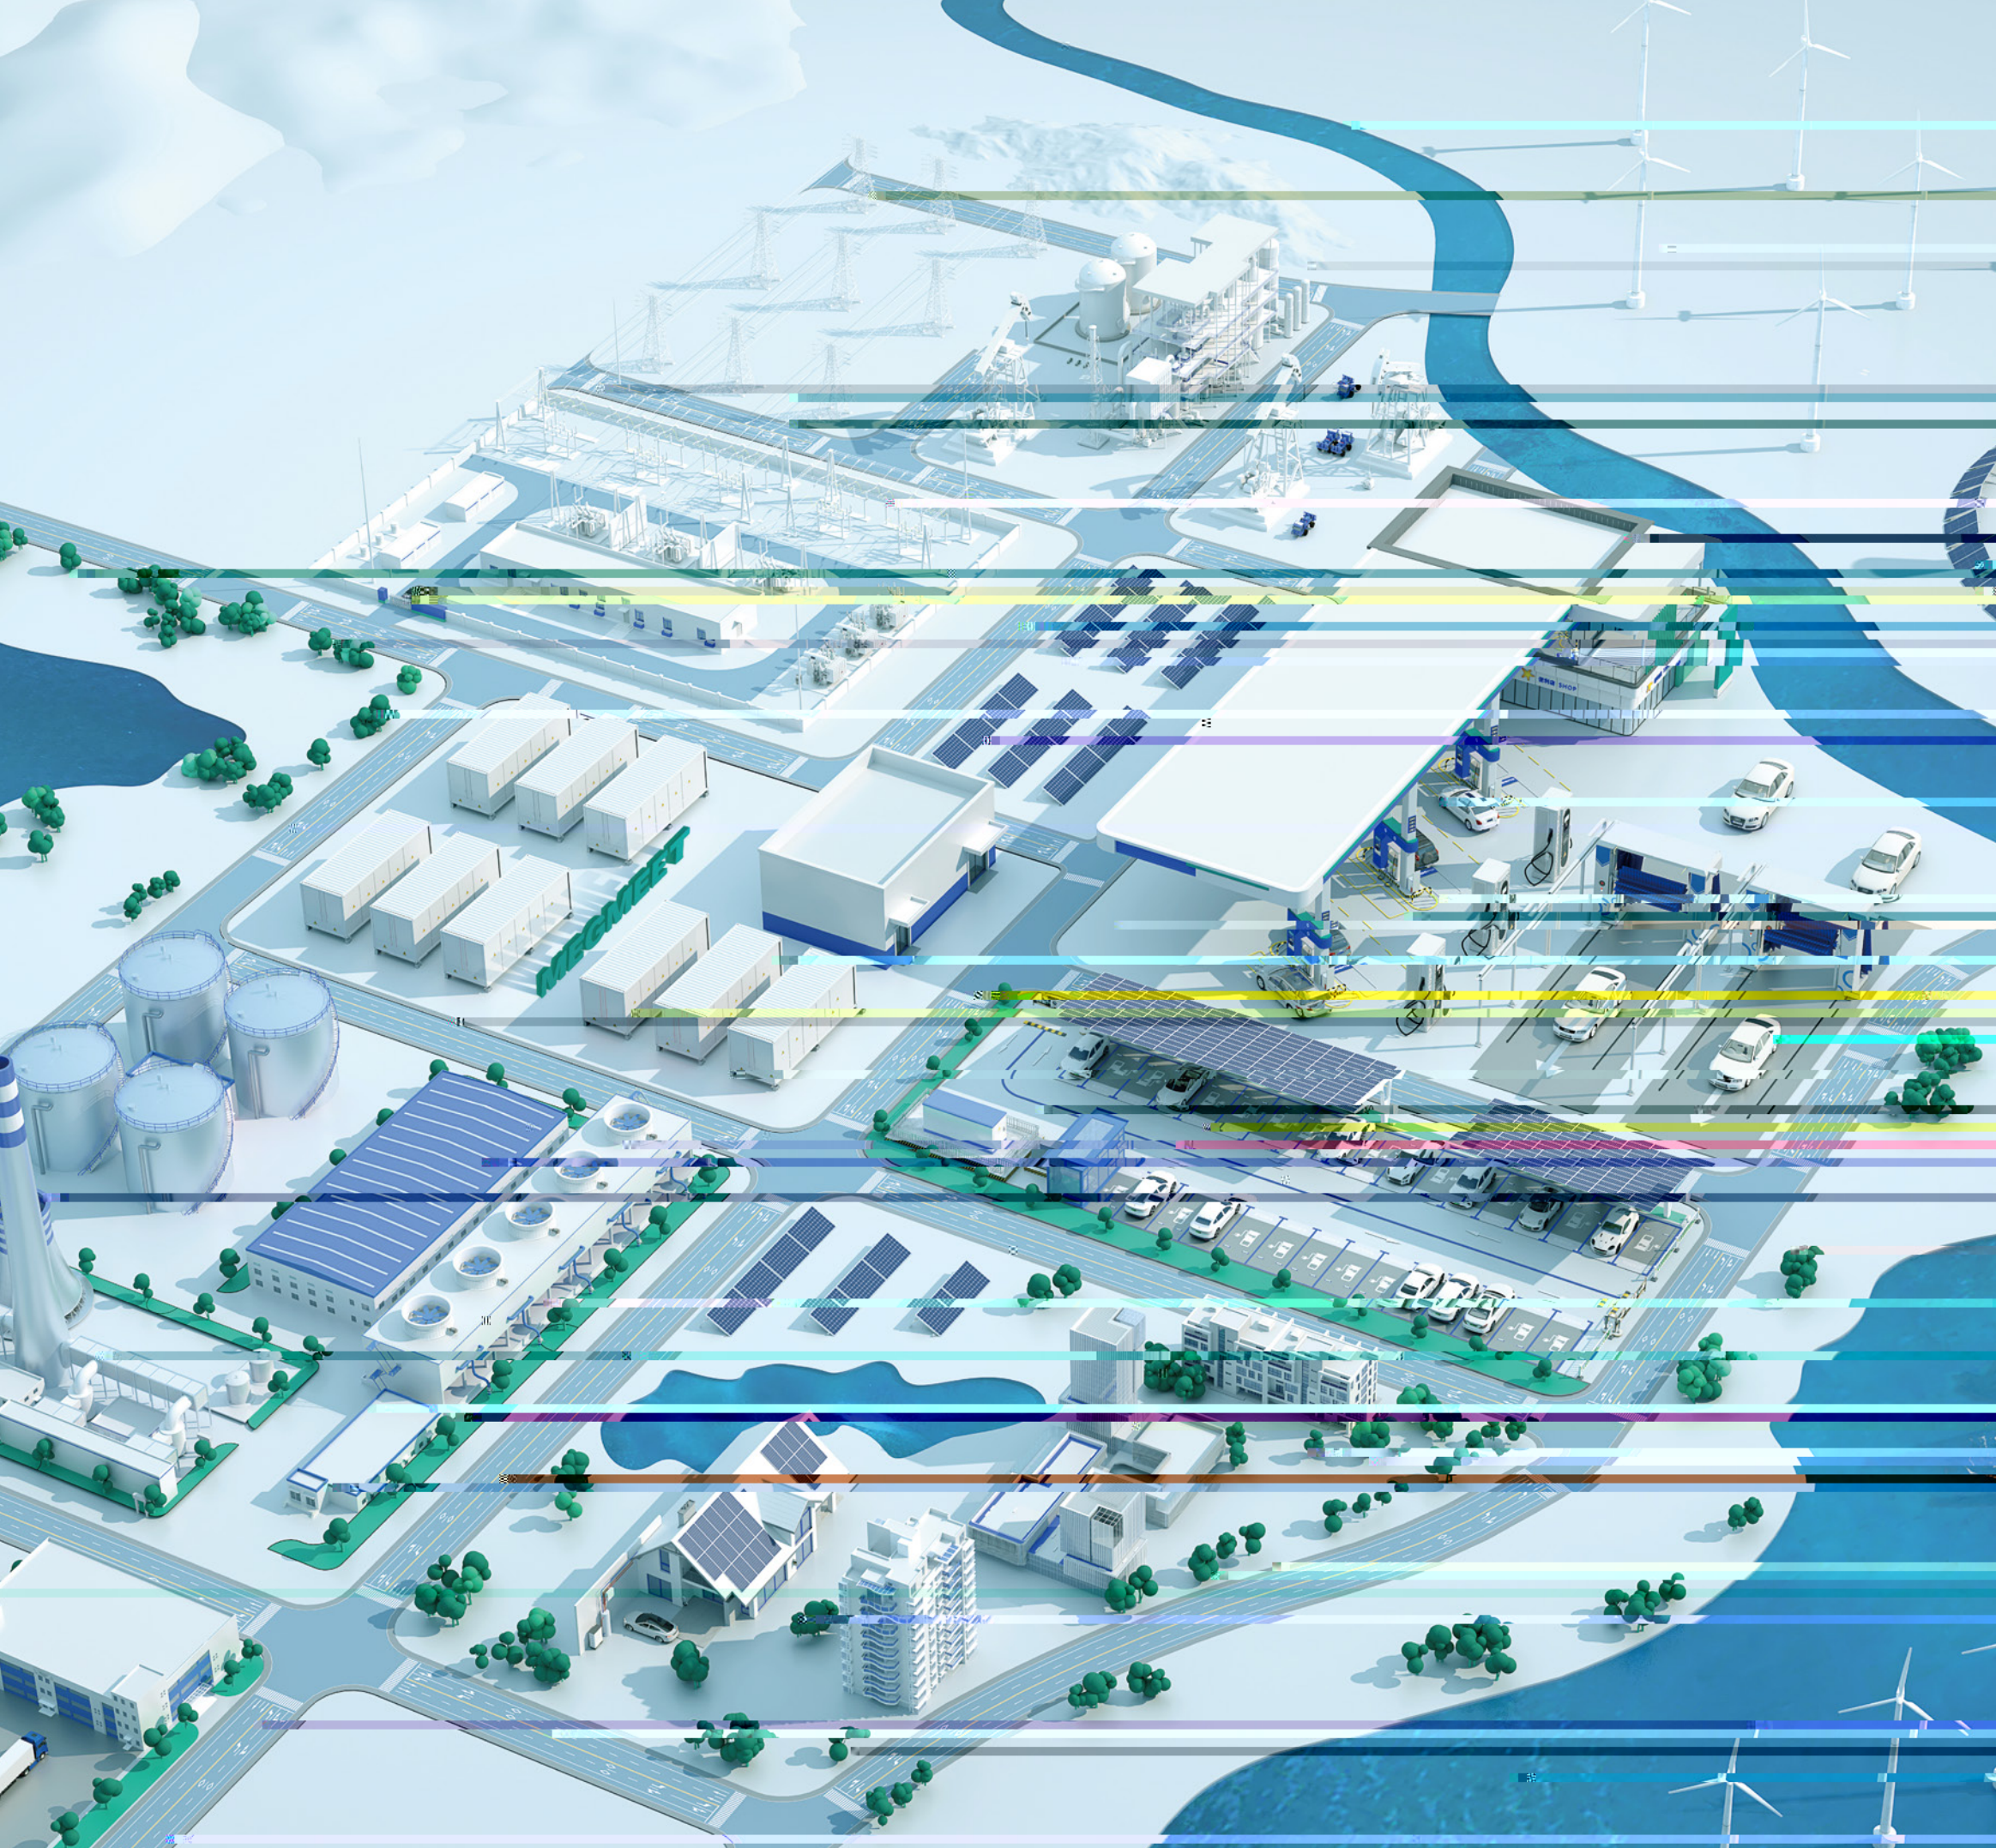

Contents

01-14	Charger
15-28	Charging Module
29-31	Charger Components
32	R&D Capability
33-34	Manufacturing Capacity

Super Fast Charging Stations

SFC 30



Universal compatibility



Smart connectivity



Safe & reliable



Efficient & convenient

AC Input	
	≥
DC Output	
	≥
	≥
	≥
	≥
Working Environment Conditions	
	≥
Function	
Appearance	



Appearance

Super Fast Charging Stations


SFC 60



AC Input	
	≧
DC Output	
	≧
	≧
	≧
	<
Working Environment Conditions	
	≧
Function	
Appearance	

Super Fast Charging Stations

SFC 60 to 180

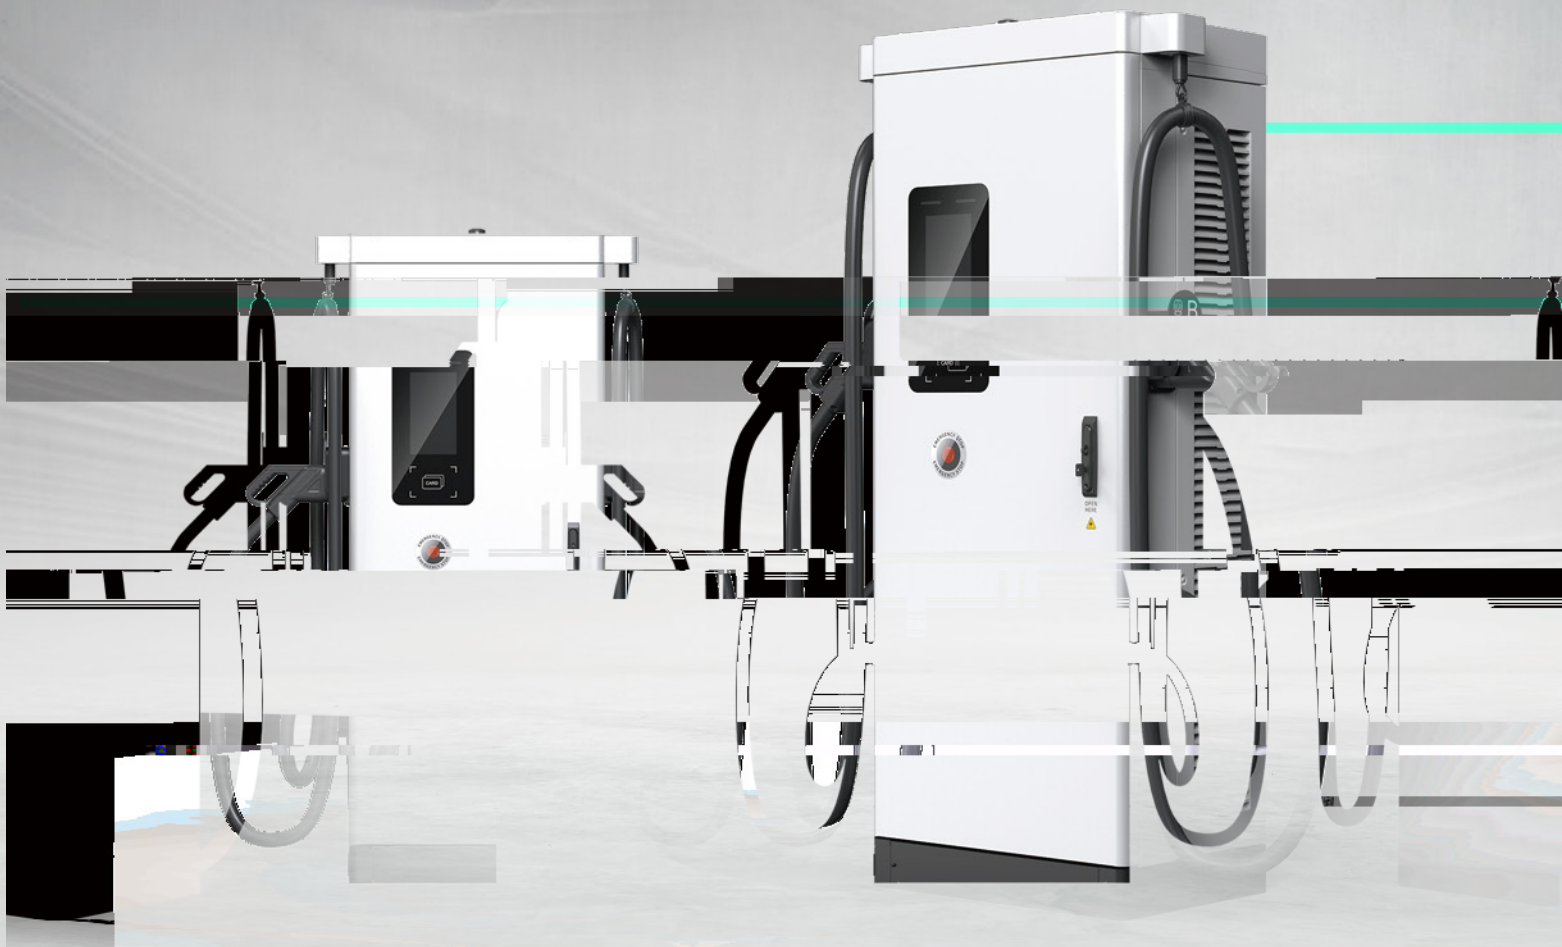

Fast charging



Safe & efficient



Intelligent operation & Maintenance



Flexible expansion

AC Input	
	> >
DC Output	
	≡
	≡
	≡
	≡
Working Environment Conditions	
	≡
Function	
Appearance	

Super Fast Charging Stations

SFC 150



Fast charging



Safe & efficient



High-grade protection



Flexible efficient

AC Input

≡

DC Output

≡

≡

≡

≡

Working Environment Conditions

≡

Function

Appearance



AC Input	
	≥
DC Output	
	≈
	≈
	≥
	≈
Working Environment Conditions	
	≈
Function	
Appearance	

Split Type Super Fast Charging Stations



Liquid cooling supercharging



Flexible allocation



Intelligent operation & maintenance



Safe & efficient

AC Input

≡

DC Output

≡

≡

Working Environment Conditions

≡

Function

Appearance

20 kW Charging Module



Wide constant power range




State grid unified size



Flexible expansion



Intelligent control

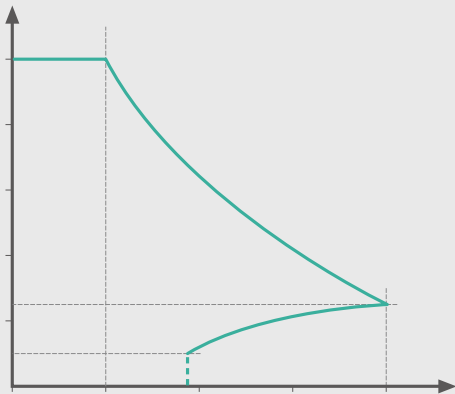

AC Input

<

>

>

<

DC Output

≡

≡

≡

≡

≡

Monitor

Working Environment Conditions

≡

>

Product Reliability and Safety

Alarm and Protection

Dimensions and Weight

20 kW Charging Module



Low voltage and high current




High power density



Flexible expansion



Intelligent control

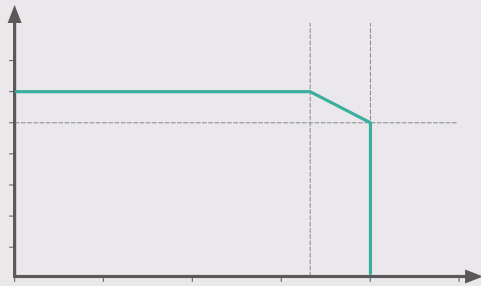

AC Input	
	<
	> >
	<
DC Output	
	≡
	≡
	≡
	≡
Monitor	
Working Environment Conditions	
	≡ >
Product Reliability and Safety	
	>
Alarm and Protection	
Dimensions and Weight	

20 kW Charging Module



Low voltage and high current




High power density



Flexible expansion



Intelligent control

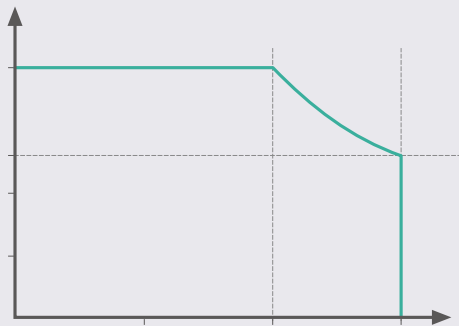

AC Input

<

>
<

DC Output

≡

≡

≡

≡

≡

Monitor

Working Environment Conditions

≡ >

Product Reliability and Safety


>

Alarm and Protection

Dimensions and Weight

30 kW Charging Module

A black, rectangular industrial charging module is shown from a front-three-quarter perspective. It features three large, circular cooling fans with black grilles. On the left side of the front panel, there is a small digital display showing '1000' in red, with two buttons below it. The device is mounted on a silver-colored metal frame. The background is a blurred image of a modern building with a glass and steel facade, suggesting a high-tech or industrial environment. Several horizontal white lines are overlaid on the image, adding a graphic design element.

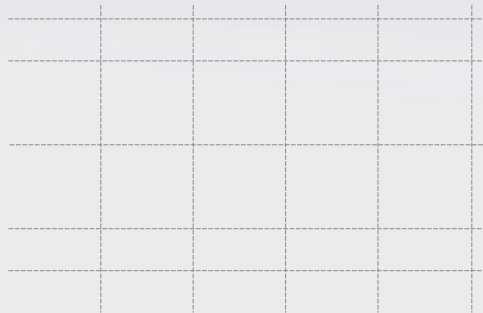



AC

<

>

>

>

>

>

>

Environment Conditions

>

Product Reliability and Safety

>

Alarm and Protection

Dimensions and Weight

25 kW Charging Module



DC Input

<

DC Output

>

Monitor


Working Environment Conditions

Product Reliability and Safety

Alarm and Protection

Dimensions and Weight

Charger Communication Control Unit (CCU)

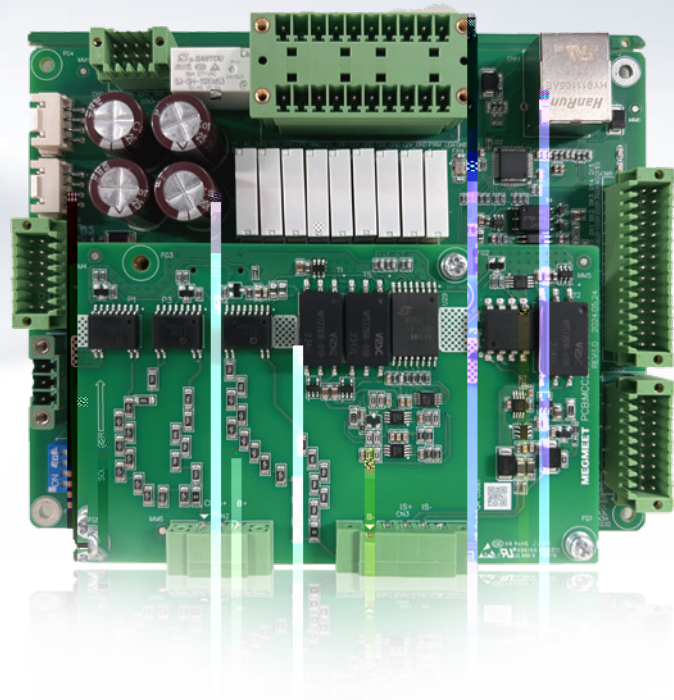


Input voltage: —
Interface parameters: — — — —

Charger Telematics Control Unit (TCU)




Input voltage: —
Storage chip: — —
Interface parameters: — — —

Charger Protocol Converter (PLC)

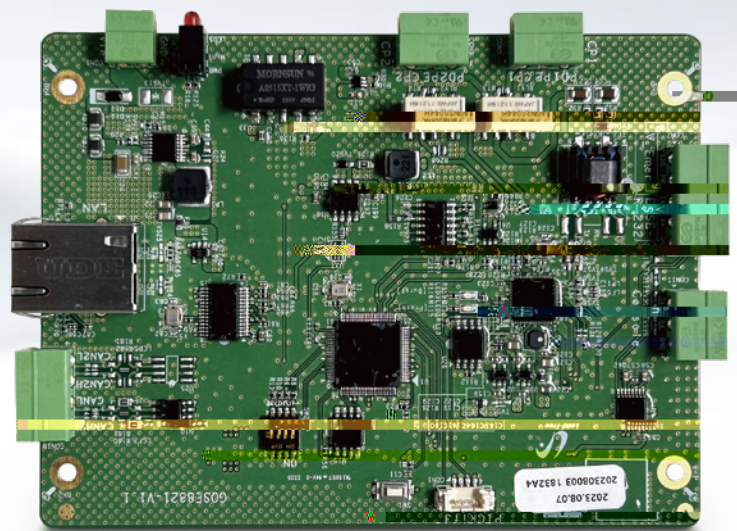

R&D CAPABILITY

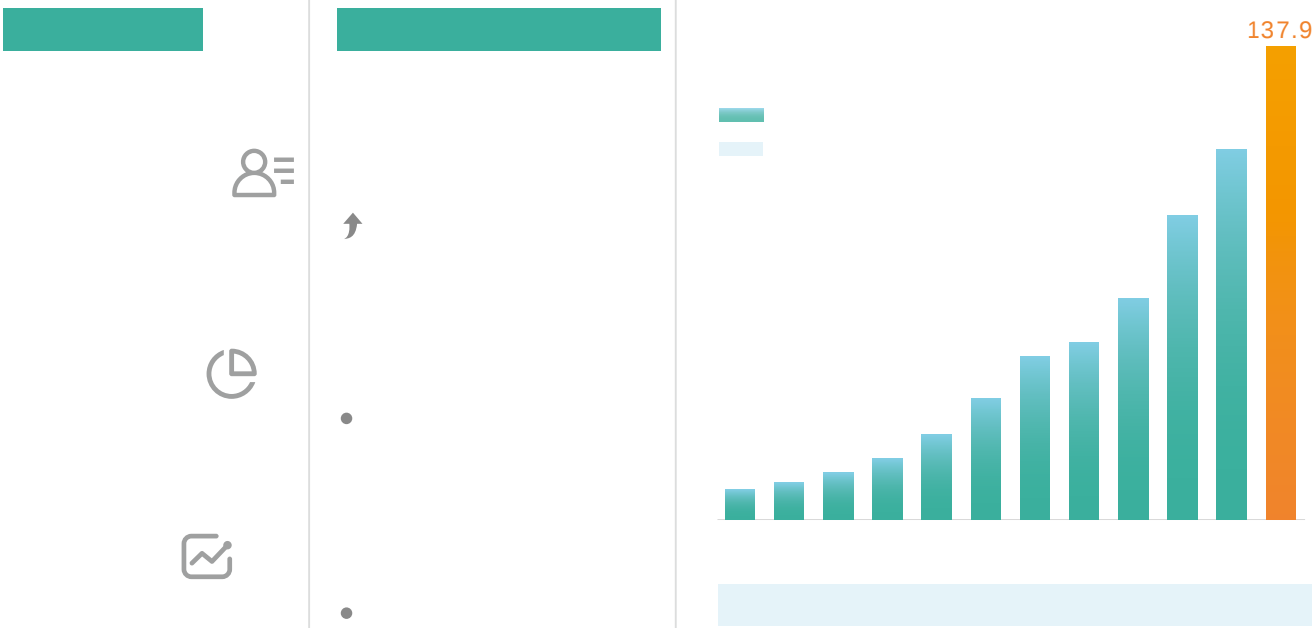

-
-
-
-
-
-

Charging standards: —

Electricity supply: —

Working power consumption: — <

Communication port: —

Dimension: —

Range of working temperature: —





ODM

2FA

