




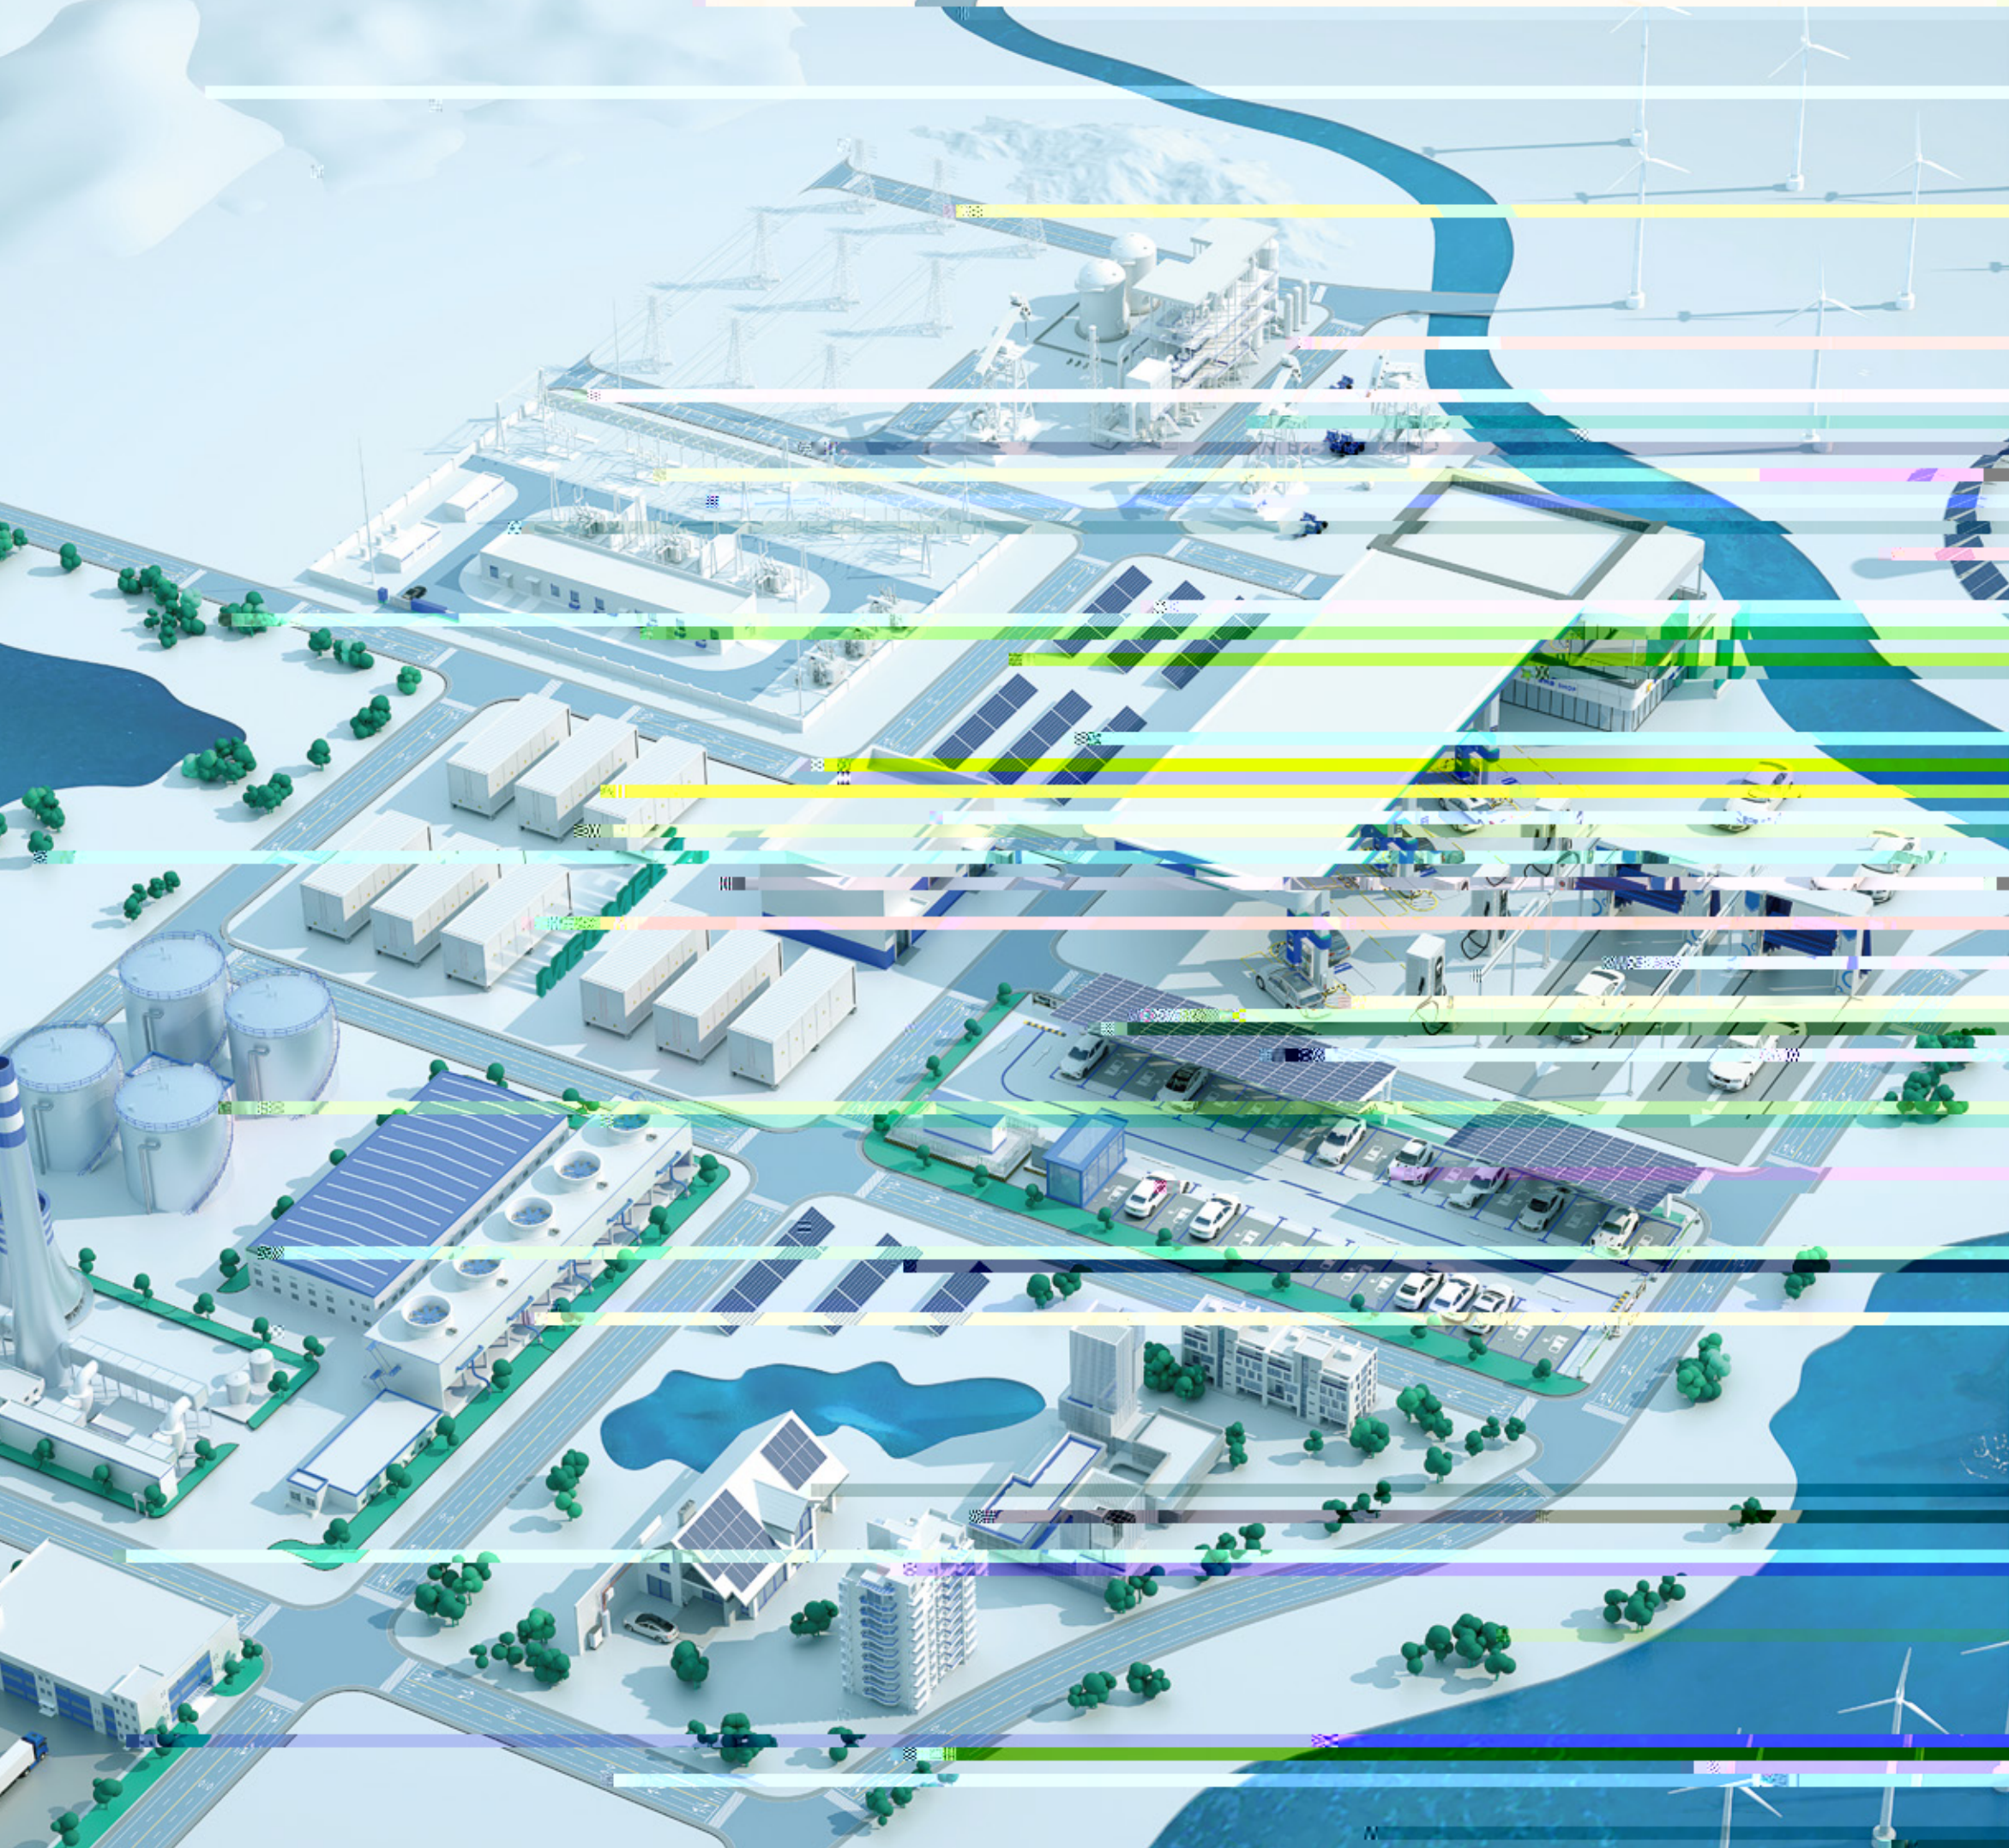

01-08

01
03
05
07
09
11

13-25

13 MIPC1000-80T
15 MPS10020KT-C
17 MPS20020KT-C
19 MIPC1000-100
21 MIPC1000-100C2
23 MIPC1000-160L
25 MIPC1000-135C1

27-29

27 CU
28 CU
29 P C

30

31-32

30 kW






120 kW



	~
	~
	~
	~
	~
	~
IP	

240 kW

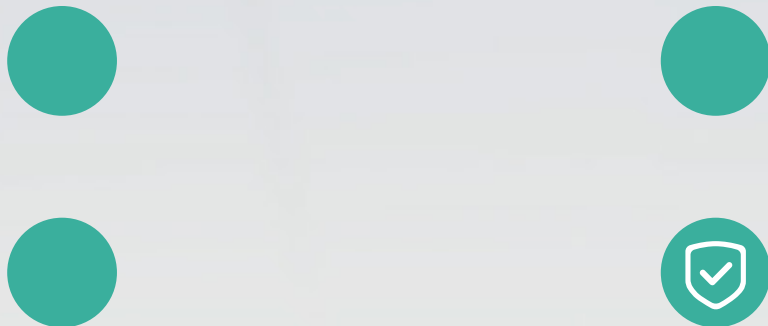

 Δ




IP54



/



OTA

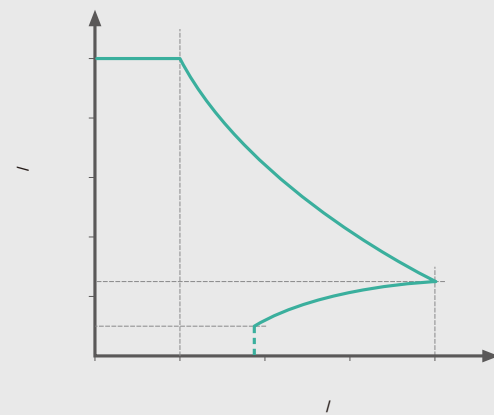

MPS10020KT-C



()

≈

≈

≈

≈ ()


≈

--


--

--

MPS20020KT-C

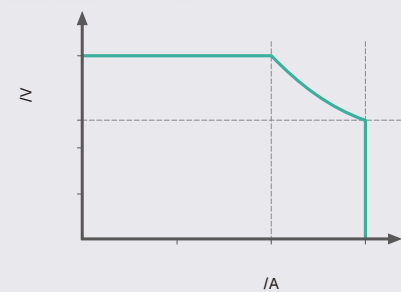

30 kW
MIPC1000-100C2

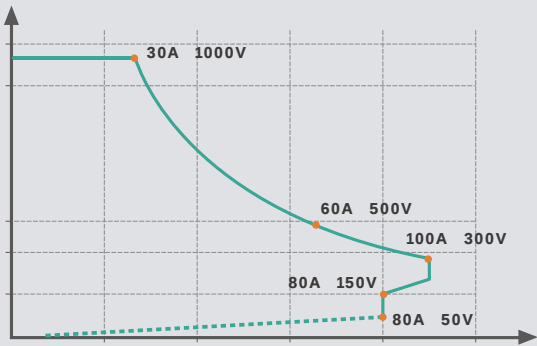


40 kW

MIPC1000-135C1



(CCU)

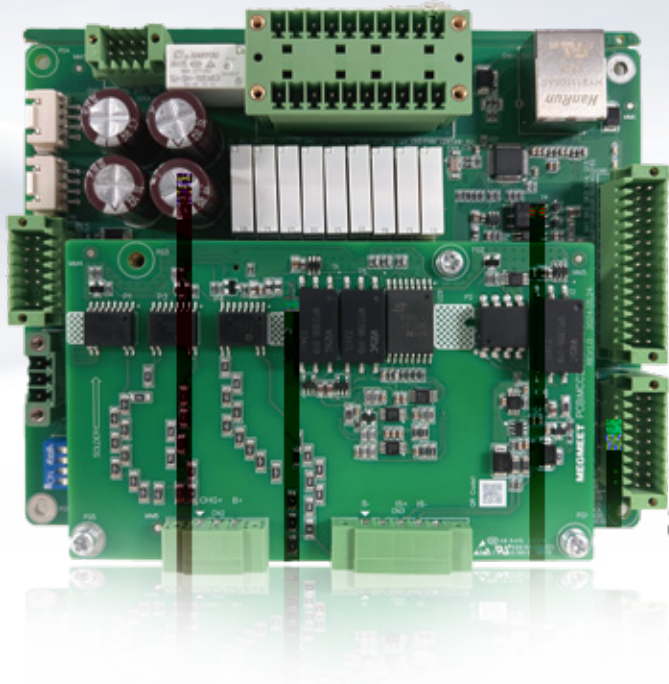


CCU

BMS



- 2 DO
- 15 DI
- 1 PWM
- 2
- 3 AN
- 1
- 1 RS485
- 1 RS232

(TCU)

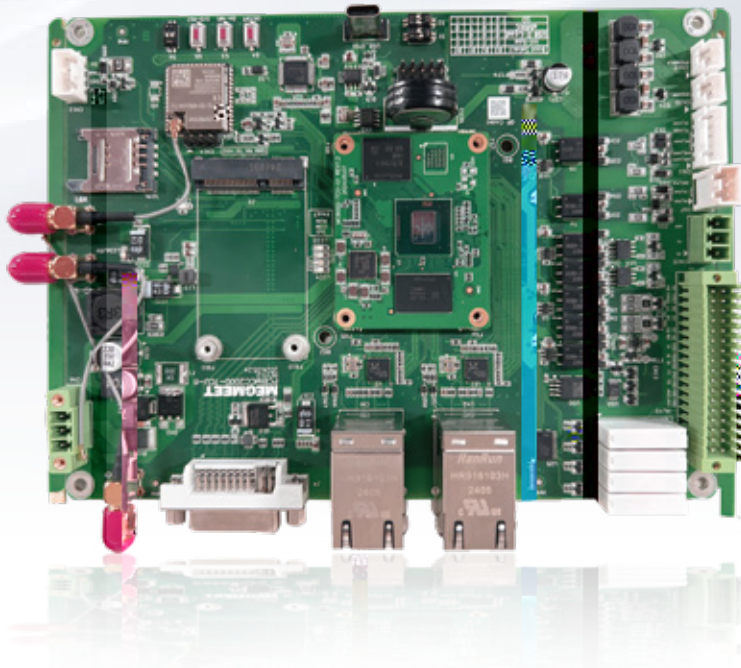

TCU

LVDS



POS M1 QR




4G WIFI



- 64 Cortex A53 , 1.8 GHz
- LPDDR4,
- 3 RS232
- 2
- 1 RS485
- 2 , 10 / 100 M
- 1 , 10 / 100 / 1000 M

(PLC

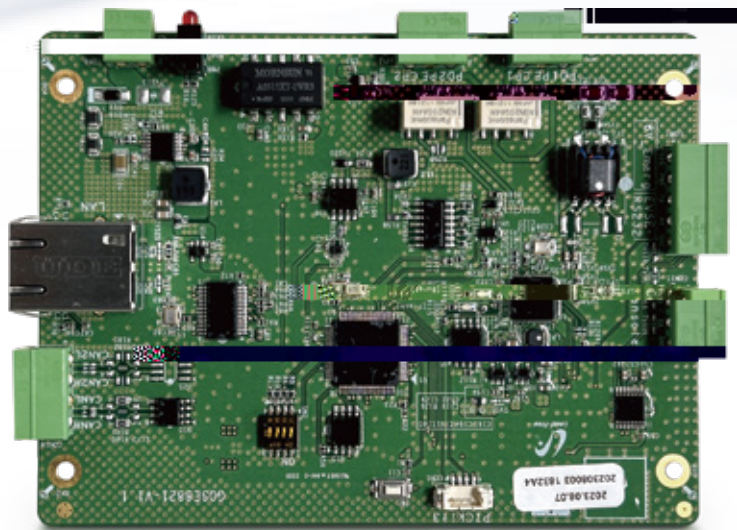

PLC

- CCS, CHAdEMO()
- CCS DIN 70121, ISO15118
- CHAdEMO , 2.0 ()
- IEC 61851-2:2023
- ()

CCS

- ,
- AN ,
- RS232 , ,
- Proxima Detection(PD)
- EIM, PnC

12 / 24 VDC
9~26 VDC

for CCS, Max. 40

119 x 229 (mm)

-40 °C ~ +85 °C

R&D

>3000

35%

32
• 9

38
• 28



CNAS TÜV UL-WTDP UL-CTF



ODM OEM

